

Suitable wastewater pumps:



Large free passage for particularly heavily contaminated wastewater with coarse admixtures up to 50 mm grain size, for solids and fibres.

US 75 ES + US 105 ES | H max 12 m, Q max 28 m³/h



For wastewater with admixtures up to 10 mm grain size, e.g. from collection tanks for groundwater and for waste water from household appliances such as dishwashers and washing machines.

US 62 ES + US 102 ES | H max 13 m, Q max 28 m³/h



For heavily contaminated water with admixtures up to 30 mm grain size without stones, for fibrous waste water from laundries, communal washing facilities and domestic appliances (washing machines and dishwashers).

US 73 ES + US 103 ES | H max 13 m, Q max 28 m³/h



JUNG PUMPEN GmbH | Industriestr. 4 - 6 | 33803 Steinhagen | Phone +49 5204 170 | info@jung-pumpen.de | www.jung-pumpen.com

PENTAIR and PENTAIR JUNG PUMPEN are trademarks, or registered trademarks of Pentair or its subsidiaries in the United States and/or other countries. © 2025 Pentair Jung Pumpen

Accessories:

Article	Material no.
Reducing sleeve 2 x 1 1/2"	JP48069
Check valve brass, DN 50, PN 16, 2"	JP44787
Chain tested, rated for 320 kg, length 2.5 m	JP45901
Chain tested, rated for 320 kg, length 5 m	JP45902
Chain tested, rated for 320 kg, length 7.5 m	JP47365
Carrying strap with shackle	JP45168
9 V battery , for mains-independent alarm	JP44850
Screen foot 10 mm free passage	JP45957



For powerful
wastewater pumps



SHAFT INSTALLATION KITS

Easyfix 50 Single
Easyfix 50 Duo

Image sources: Jung Pumpen GmbH, Karol Grec

P 313-1.0 EN -2512




Easyfix 50 Single

FOR A SINGLE SYSTEM

Scope of supply: | Dimensions:

- ▶ Guide rail system on base plate
- ▶ Pressure pipe with non-return valve (fully pre-assembled)
- ▶ Guide rail claw
- ▶ Elastic connection
- ▶ Clamps

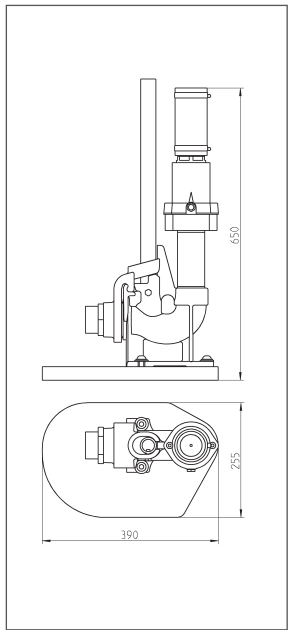

Material no.	Weight kg	Shaft dimensions mm
JP51001	11	min. 600 x 300

Quick in, quick out, quick done!

Pumps in shafts must be maintained, repaired and, first of all, installed. The Easyfix 50 installation kits make all these tasks easier. With minimal effort, the pumps can be lowered into the shaft and pulled out again using the kits.

- ▶ **Easyfix 50 Single for single systems;**
Easyfix 50 Duo for double systems
- ▶ Quick and easy installation
- ▶ Ready to plug in
- ▶ Slide tube pre-mounted on base plate
- ▶ **Easyfix Duo incl. control unit**

The Easyfix 50 installation kits are available for powerful dirty water pumps in our US 62 ES - US 105 ES series. They can be installed in shafts both inside and outside buildings. All necessary components are pre-assembled on a base plate, ready for connection to the pressure pipe.



INSTALLATION MADE EASY




Easyfix 50 Duo

FOR A DOUBLE SYSTEM

Scope of supply: | Dimensions:

- ▶ 2 x Guide rail system on base plate
- ▶ Pressure pipe with non-return valve (fully pre-assembled)
- ▶ Guide rail claws
- ▶ Elastic connection
- ▶ Clamps
- ▶ **Plug-in EasyLogo control,**
1.5 m cable (incl. level sensor with 10 m connection cable), regulates alternating operation of the pumps, ensures alarm messages and peak operation

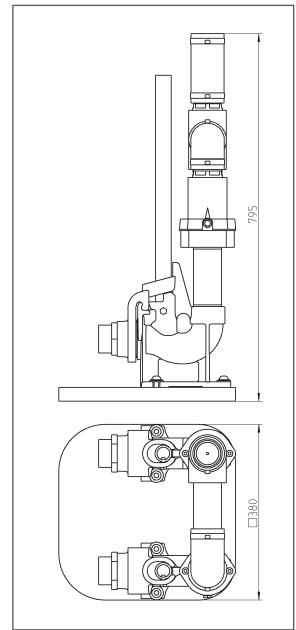

Material no.	Weight kg	Shaft dimensions mm
JP51000	23	min. 600 x 600